

G·PLUS

DENIBBER TOOL.



PRODUCT INFORMATION

PRODUCT	SKU	SGA UPC
Tool Only	GPT320	662544 27055
Battery	GPT125	662544 27041
Charger	GPT126	662544 27042
Kit (Tool, Battery & Charger)	GPT325	662544 27054

PRODUCT DESCRIPTION

The G Plus Denibber Tool is purpose-built for precision surface correction in automotive and industrial applications - all without the hassle of cords. Compact, lightweight and engineered for control, this specialist tool enables rapid, refined defect removal in hard-to-reach areas.

With a 3mm orbit and variable speed control (4000–10,000 OPM), it delivers exceptional consistency and finesse. Whether you're tackling minor nibs or working to refine finishes pre-polish, the denibber ensures professional-grade results with minimal rework required.

Designed around a powerful 10.8V brushless motor, it offers excellent durability and reduced maintenance, while the slim ergonomic body and rubberised grip allow for prolonged, comfortable use - even in demanding environments.

SUPPLIED WITH 10 ABRASIVE DISCS

KEY BENEFITS

3MM OSCILLATING ORBIT	Easy to control and very fine finish
VARIABLE SPEED	Speed ranges from 4000 to 10000opm, providing control for different applications
LIGHTWEIGHT (0.45kg)	Reduces fatigue when working for long periods
ERGONOMIC BODY	Rubberised handle and comfortable for extended use
BRUSHLESS MOTOR	Delivers durability, efficiency and minimal maintenance



fareclaproductsltd


Farécla | SURFACE FINISHING SPECIALISTS

Only use the charger and battery pack specified by Farécla. Read the operator's manual supplied with your charger and battery.

FUNCTIONAL DESCRIPTION

1. Backing plate
 - PSA (**GPT174**)
 - Hook & Loop (**GPT173**)
2. Trigger switch
3. Speed level indicator
4. Battery (**GPT125**) *

* Battery (**GPT125**) Sold Separately

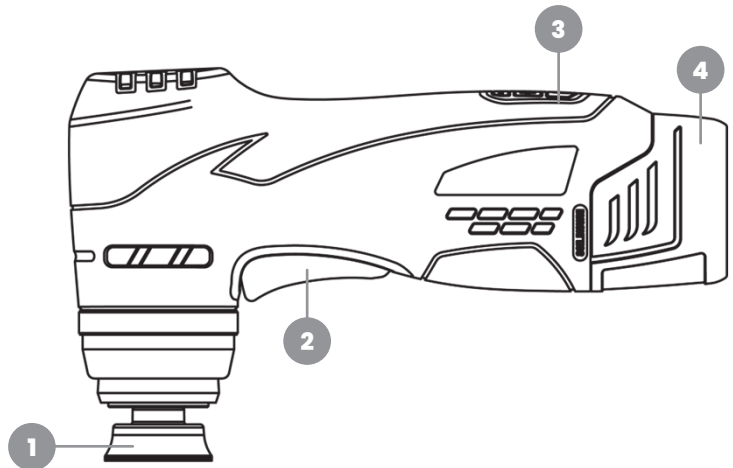

G PLUS RECHARGEABLE BATTERY
for GPT020 – GPT220 – GPT320
18V (5.0Ah)

GPT125 (662544**27041**)



G PLUS MINI BATTERY CHARGER
for GPT125

GPT126 (662544**27042**)

- Charger supplied with an EU Plug Type C cable with a pre-fitted UK Plug Type G adapter
- Recommended temperature range for machine use and battery charging: +4°C to +40°C
- Battery and charger both have charge indicator lights

G PLUS MINI TOOL RANGE:

G Plus Rotary Mini Polisher (tool only)
G Plus Dual Action Mini Polisher (tool only)
G Plus Denibber Tool (tool only)
G Plus Rechargeable Battery
G Plus Mini Battery Charger


PART NO

GPT020 (662544**27052**)
GPT220 (662544**27053**)
GPT320 (662544**27055**)
GPT125 (662544**27041**)
GPT126 (662544**27042**)



fareclaproductsltd

Farécla | SURFACE FINISHING
SPECIALISTS

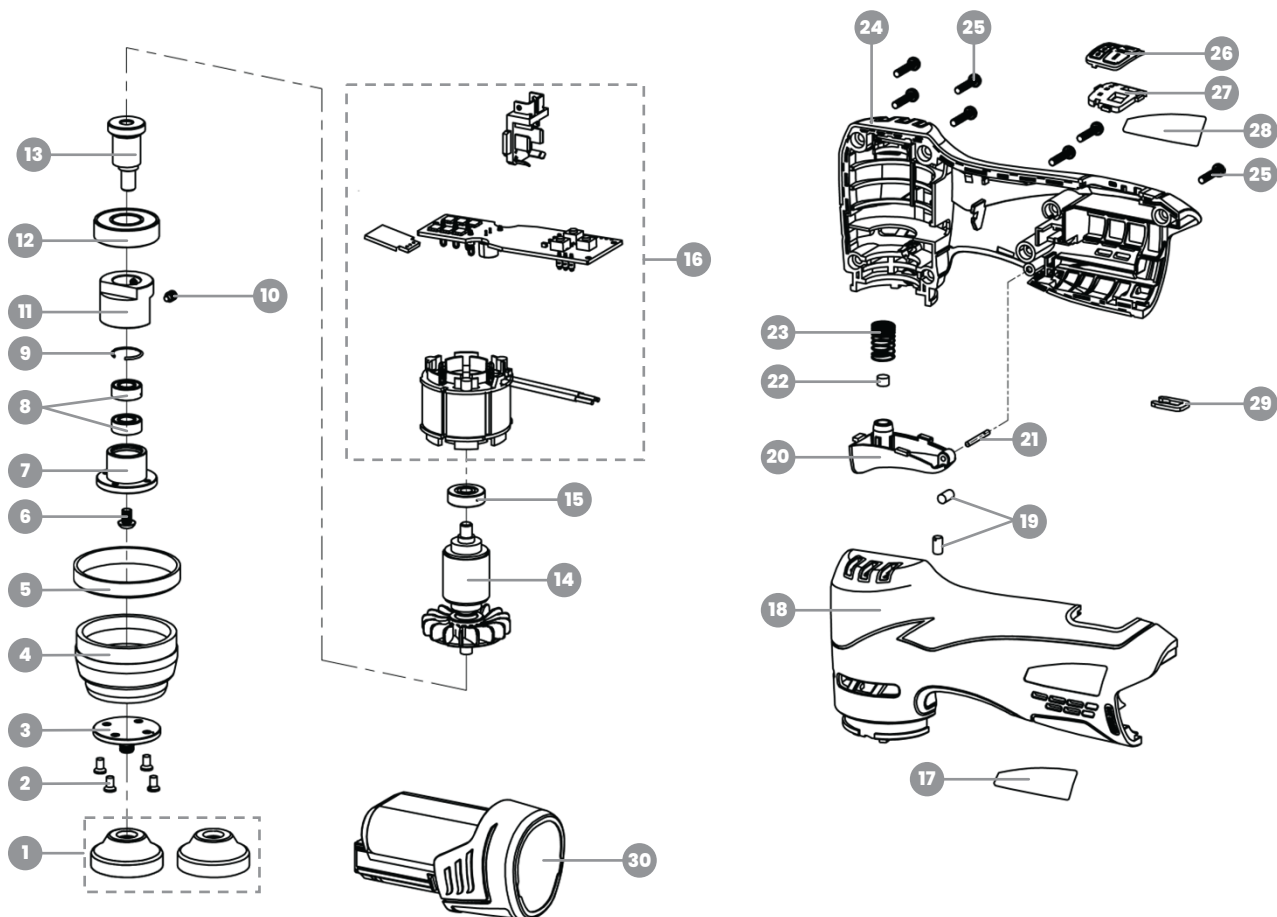

SPARE PARTS

No.	Part name	No.	Part name	No.	Part name
1	Backing Plate: GPT174 Backing plate (PSA) / GPT173 Backing plate (Hook & Loop)	15	Ball bearing 625-2RS	23	Spring 0.6 x 10 x 20
2	Screw M3 x 6	16	Outer runner motor-controller assembly	24	Housing (right)
3	Backing plate support – GPT175	17	Label	25	Screw ST3 x 18
4	Swing seat – GPT114	18	Housing (left)	26	Switch panel – GPT146
5	Holding ring – GPT115	19	Rubber pin	27	Panel support
6	Screw M4 x 6	20	Trigger – GPT123	28	Label
7	Bearing seat – GPT168	21	Location pin $\varnothing 2 \times 18$	29	Clip
8	Ball bearing 686Z	22	Magnetic steel D5 x 3.6	30	Battery – GPT125 *
9	Circlip for holes 13				
10	Screw M4 x 6				
11	Counterweight – GPT116				
12	Ball bearing 6001-2RS – GPT144				
13	Eccentric shaft – GPT139				
14	Armature – GPT157				

* Battery (**GPT125**) Sold Separately



fareclaproducltd

Farécla | SURFACE FINISHING SPECIALISTS